


# M SERIES

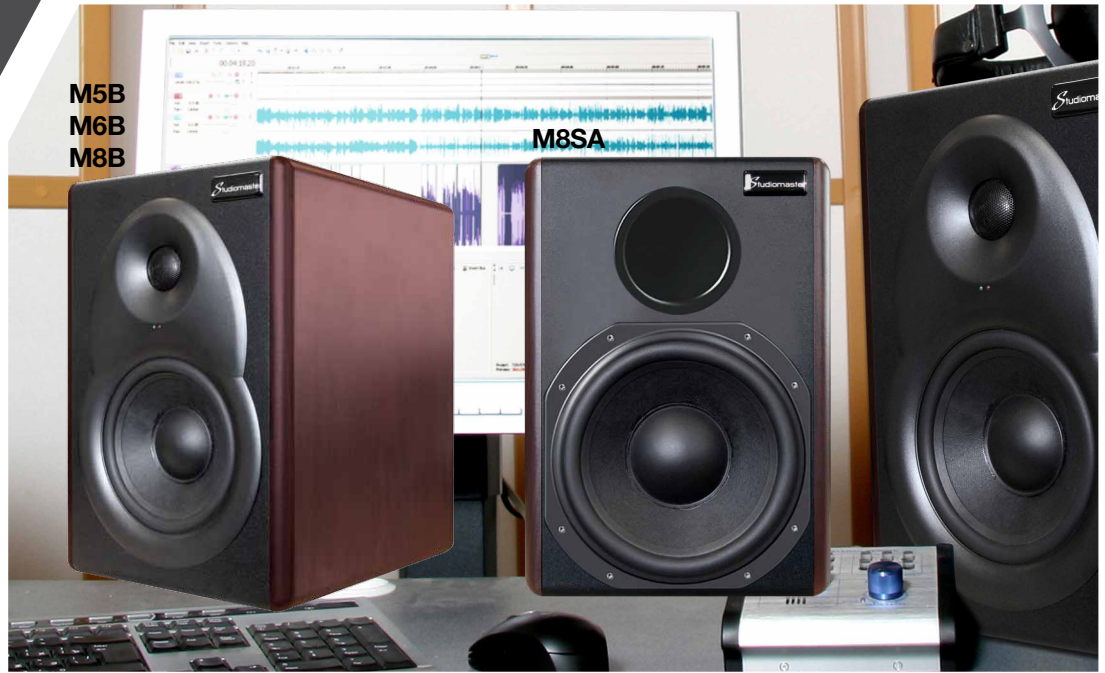

M5B  
M6B  
M8B

M8SA

The M series is the latest development of studio monitors from Studiomaster featuring three full range cabinets and one low frequency sub.

Their design ensures you critical monitoring of your mixes, through expert development from the speaker cones to the baffle moulding, providing optimal dispersion. The mdf internally braced cabinets are exceptionally ridged giving vibration free performance. The rubber surround, sandwich constructed cones produce a smooth frequency response whilst the titanium diaphragm tweeter is fluid cooled for long term reliability. All full range models are bi-amplified with contour switches to help match room acoustics and the balanced input provides noise free connection.



M5B/M6B/M8B Rear Panel



M8SA Rear Panel

## SPECIFICATION

	M5B	M6B	M8B	M8SA
Frequency Response ±3dB	65-20kHz	50-20kHz	45-20kHz	45-500Hz
LF power rms	50W	60W	90W	90W
HF Power rms	25W	30W	45W	-
Drivers LF	5"	6.5"	8"	8"
Drivers HF	¾" dome	1" dome	1" dome	-
Crossover	2.2kHz	2.5kHz	2.7kHz	100Hz
Input Sensitivity	+4dBu	+4dBu	+4dBu	+4dBu
Connection	XLR + 1/4" jack	XLR + 1/4" jack	XLR + 1/4" jack	XLR + 1/4" jack
Power Requirements	230V models: 220 - 240V AC 50/60Hz 115V models: 110 - 127V AC 50/60Hz			
Dimensions				
Width	195 mm(7.7")	245 mm(9.6")	256 mm(10")	256 mm(10")
Height	260 mm(10.2")	327 mm(12.9")	410 mm(16.1")	410 mm(16.1")
Depth	155 mm(6.1")	310 mm(12.2")	364 mm(14.3")	364 mm(14.3")
Weight				
Net	7kg(15.4lbs)	11kg(24.3lbs)	15kg(33.1lbs)	15kg(33.1lbs)
Shipping	9kg(19.8lbs)	14kg(30.9lbs)	19kg(41.9lbs)	17kg(37.5lbs)